

Nano-polycrystalline CBN Grade

NCB100 SUMIBORON Binderless CBN

Ultimate CBN Grade Achieves Highly Efficient and Precise Finishing
of Hard-to-Cut Materials



NCB100




■ Features

SUMIBORON Binderless is a polycrystalline cubic boron nitrid (CBN) that directly binds nanometer- or sub-micron-level CBN particles without binder materials.

Binderless CBN is harder and has better thermal conductivity. Therefore, it enables higher efficiency and longer tool life in machining of hard-to-cut materials, such as titanium alloy and cobalt-chromium alloy.

■ Microstructure of Sintered Body

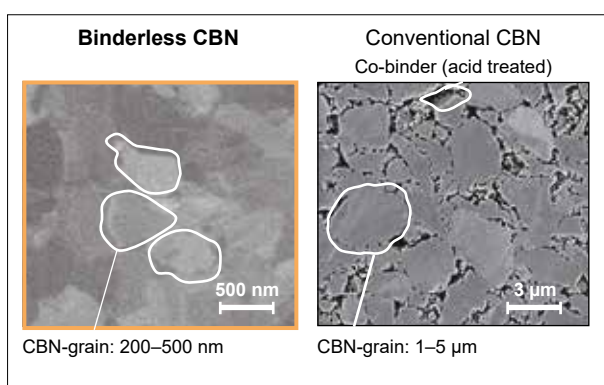

■ Physical Properties

	Binderless CBN	Conventional CBN
CBN Content (%)	100	90–95
Binder Material	–	WC–Co
Hardness (GPa)	51–54	41–44
Thermal Conductivity (W/m·K)	180–200	100–120


SUMIBORON Binderless CBN

■ Advantages

- Higher efficient machining and longer tool life have been realized by the effects of higher hardness and thermal conductivity than conventional CBN grades.
- Achieves high precise machining and better surface integrity because of less adhesion by not containing any binder materials.
- Ideal tool material for high-efficient finishing of hard-to-cut materials, such as titanium alloy and cobalt-chromium alloy, cemented carbides and cermets.
- NBC100 is able to maintain excellent dimensional accuracy and surface roughness for a long period.
- Shows improved work efficiency and cost reduction by less frequency of exchanging inserts compared to conventional tool grades.





Application Range and Performance - Turning of Titanium Alloy (Ti-6Al-4V)

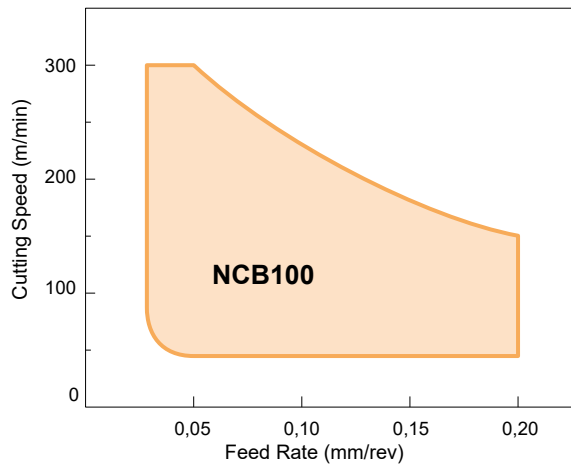

Wear Resistance



In high-speed machining NCB100 shows 35 times better wear resistance compared to carbide, because of its excellent physical properties.

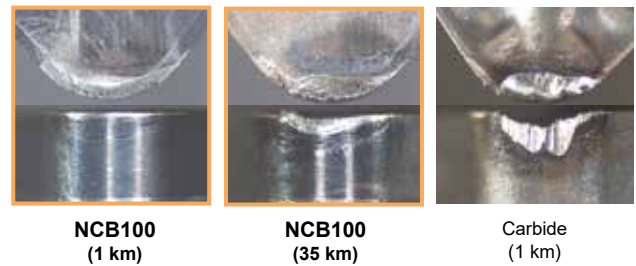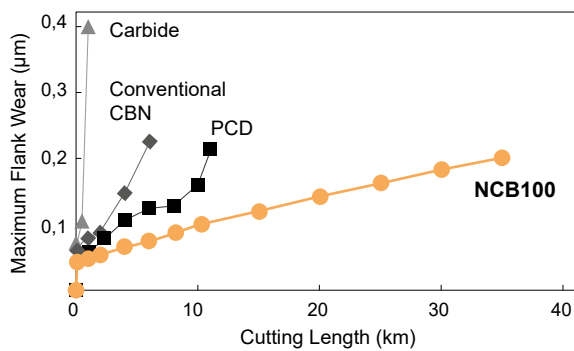

Work Material: Ti-6Al-4V
 Insert: CNGA 120408 NU
 Cutting Conditions: $v_c = 150$ m/min, $f = 0,15$ mm/rev, $a_p = 0,5$ mm, wet

Surface Roughness


NCB100 keeps a constant surface roughness, which is close to the theoretical (calculated) surface roughness.

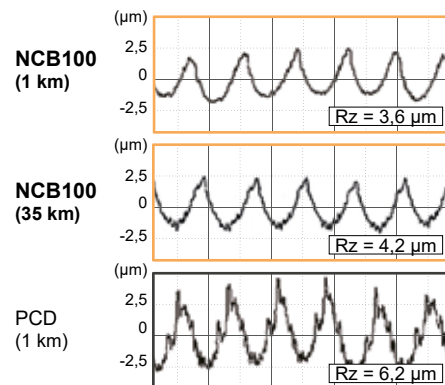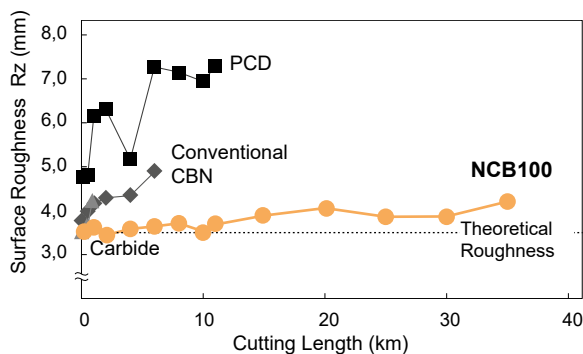

Work Material: Ti-6Al-4V
 Insert: CNGA 120408 NU
 Cutting Conditions: $v_c = 150$ m/min, $f = 0,15$ mm/rev, $a_p = 0,5$ mm, wet


NCB100

Application Range and Performance - Turning of Cobalt-Chromium Alloy (Co-Cr)

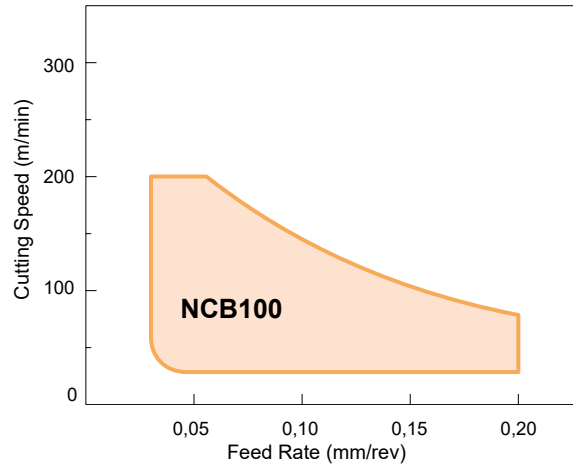

Wear Resistance

NCB100 shows excellent wear resistance on a cutting speed of 150 m/min and can be used at high efficiency machining.

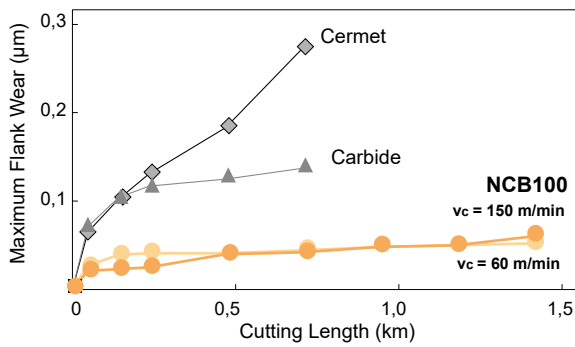

NCB100 (0,5 km)



Cermet (0,5 km)







Carbide (0,5 km)

Work Material: Co-Cr
 Insert: VNGA 160408 NU
 Cutting Conditions: $v_c = 60, 150$ m/min, $f = 0,1$ mm/rev, $a_p = 0,4$ mm, wet

Surface Roughness

NCB100 keeps stable surface roughness.

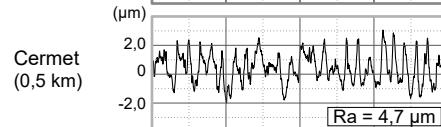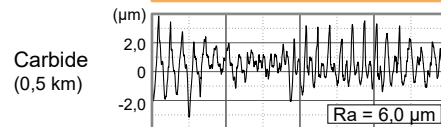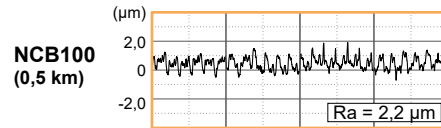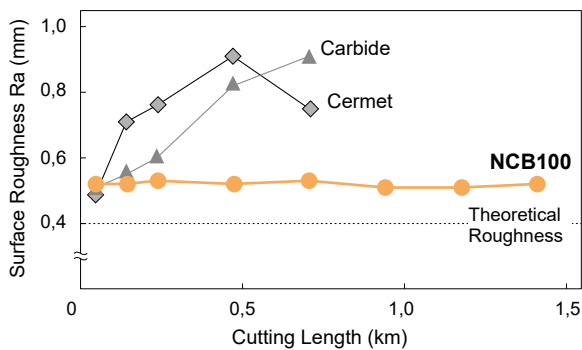

Work Material: Co-Cr
 Insert: VNGA 160408 NU
 Cutting Conditions: $v_c = 60, 150$ m/min, $f = 0,1$ mm/rev, $a_p = 0,4$ mm, wet

Recommended Cutting Conditions**Titanium Alloys**Min. - **Optimum** - Max.

Work Material		Grade	Cutting Conditions		
Composition	Hardness (HRC)		Depth of Cut (mm)	Feed Rate (mm/rev)	Cutting Speed (m/min)
Ti-6Al-4V	30–35	NCB100	0,1– 0,3 –0,5	0,05– 0,15 –0,20	50– 200 –300
Ti-5Al-5V-5Mo-3Cr	32–38	NCB100	0,1– 0,3 –0,5	0,05– 0,10 –0,20	50– 150 –250
Ti-10V-2Fe-3Al	32–38	NCB100	0,1– 0,3 –0,5	0,05– 0,10 –0,20	50– 150 –250

Cobalt-Chromium AlloysMin. - **Optimum** - Max.

Work Material		Grade	Cutting Conditions		
Composition	Hardness (HRC)		Depth of Cut (mm)	Feed Rate (mm/rev)	Cutting Speed (m/min)
Co-30Cr-5Mo	35–45	NCB100	0,10– 0,15 –0,30	0,05– 0,15 –0,20	50– 200 –300

CarbidesMin. - **Optimum** - Max.

Work Material		Grade	Cutting Conditions		
Composition	Hardness (HRA)		Depth of Cut (mm)	Feed Rate (mm/rev)	Cutting Speed (m/min)
WC-20Co	<85	NCB100	0,03– 0,10 –0,20	0,03– 0,10 –0,20	5– 20 –40

SUMIDIA BINDERLESS NPD10 is recommended for: > 85 HRA

Other Work MaterialsMin. - **Optimum** - Max.



Work Material		Grade	Cutting Conditions		
Composition	Hardness (HV)		Depth of Cut (mm)	Feed Rate (mm/rev)	Cutting Speed (m/min)
Pure Titanium	130–230	NCB100	0,1– 0,3 –0,5	0,05– 0,10 –0,20	100– 250 –400
Cermet	1.000–1.500	NCB100	0,1– 0,2 –0,3	0,05– 0,10 –0,20	10– 30 –50

NCB100

Application Examples

Ti-6Al-4V, Turbine disk

Excellent wear resistance in high speed finishing.

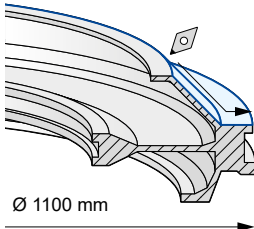



NCB100 (26 km)

Insert: CNGA 120408 NU
Cutting Conditions: $v_c = 140$ m/min, $f = 0,1$ mm/rev, $a_p = 0,2$ mm, wet

Ti-5Al-5V-5Mo-3Cr, Landing Gear Parts

Excellent flank and crater wear resistance.

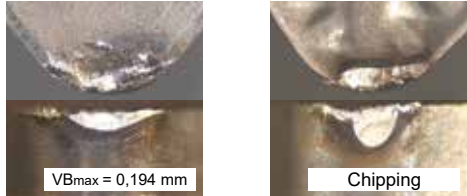



NCB100 (5 km) **Carbide (0,3 km)**

Insert: CNGA 120408 NU
Cutting Conditions: $v_c = 150$ m/min, $f = 0,1$ mm/rev, $a_p = 0,4$ mm, wet

Pure Titanium, Target for PVD Process

Better wear resistance in higher cutting speed than carbide.

Criteria: Appearance

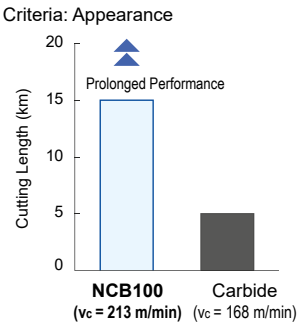



NCB100 (15 km)


Insert: DCGW 11T308 NU
Cutting Conditions: $v_c = 213$ m/min, $f = 0,1$ mm/rev, $a_p = 0,25$ mm, wet

Cobalt-Chromium Alloy, Head for Artificial Joint

Much longer tool life in double efficiency than carbide.

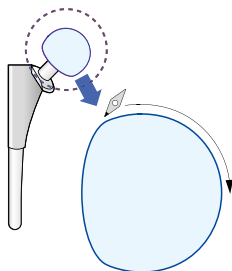

Criteria: Appearance, Roughness

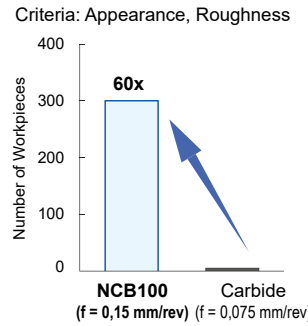


NCB100 (f = 0,15 mm/rev) **Carbide (f = 0,075 mm/rev)**

Insert: VNGA 160408 NU
Cutting Conditions: $v_c = 65$ m/min, $f = 0,15$ mm/rev, $a_p = 0,2$ mm, wet


Carbide, Finishing of Inner Diameter

Excellent wear resistance in finishing of Co-rich carbide.



HRA 80-86

Criteria: Dimension

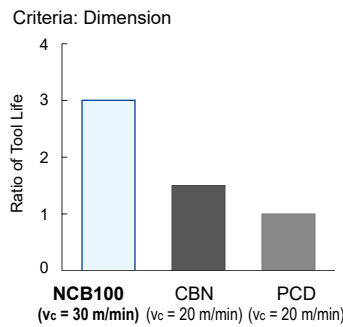


NCB100 (vc = 30 m/min) **CBN (vc = 20 m/min)** **PCD (vc = 20 m/min)**

Insert: CCGW 09T304 NU
Cutting Conditions: $v_c = 30$ m/min, $f = 0,1$ mm/rev, $a_p = 0,1$ mm, dry


Cermet, Parts for Mold Injection

Better wear resistance in machining of hard cermet.



HRC 69, Cermet




Criteria: Dimension, Appearance

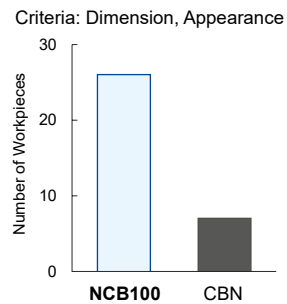

NCB100 **CBN**








Insert: CNGA 120412 NU
Cutting Conditions: $v_c = 32$ m/min, $f = 0,12$ mm/rev, $a_p = 0,25$ mm, dry

■ Negative Type Inserts


Shape	Cat. No.	Stock	No. Cutt. Edges	Dimensions (mm)				
				Cutting Edge Length	Inscribed Circle	Thick-ness	Screw Hole Ø	Nose Radius
	CNGA 120404 NU	○	1	2,5	12,7	4,76	5,16	0,4
	120408 NU	○		2,4				0,8
	120412 NU	○		2,3				1,2
	DNGA 150404 NU	○	1	2,5	12,7	4,76	5,16	0,4
	150408 NU	○		2,1				0,8
	150412 NU	○		2,0				1,2
	VNGA 160404 NU	○	1	2,5	9,525	4,76	3,81	0,4
	160408 NU	○		1,6				0,8

○ Japan stock

■ Positive Type Inserts

Shape	Relief Angle	Cat. No.	Stock	No. Cutt. Edges	Dimensions (mm)				
					Cutting Edge Length	Inscribed Circle	Thick-ness	Screw Hole Ø	Nose Radius
	7°	CCGW 060204 NU	○	1	2,3	6,35	2,38	2,8	0,4
	7°	CCGW 09T304 NU	○	1	2,5	9,525	3,97	4,4	0,4
		09T308 NU	○		2,4				0,8
	7°	DCGW 070204 NU	○	1	2,5	6,35	2,38	2,8	0,4
	7°	DCGW 11T304 NU	○	1	2,5	9,525	3,97	4,4	0,4
		11T308 NU	○		2,1				0,8
	5°	VBGW 110304 NU	○	1	2,5	6,35	3,18	2,8	0,4
		110308 NU	○		1,6				0,8
	5°	VBGW 160404 NU	○	1	2,5	9,525	4,76	4,4	0,4
		160408 NU	○		1,6				0,8
	7°	VCGW 160404 NU	○	1	2,5	9,525	4,76	4,4	0,4
		160408 NU	○		1,6				0,8

■ Cutting Edge Preparation

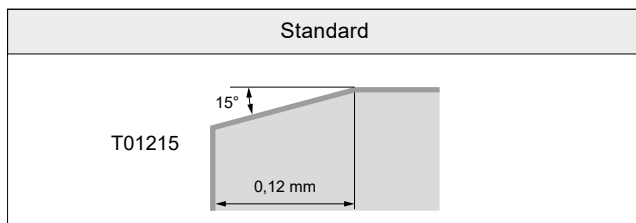



CARBIDE - CBN - DIAMOND

(Germany)

SUMITOMO ELECTRIC Hartmetall GmbH
Konrad-Zuse-Straße 9, 47877 Willich

Tel. +49 2154 4992-0, Fax +49 2154 4992-161
Info@SumitomoTool.com
www.SumitomoTool.com



(UK and Ireland)

SUMITOMO ELECTRIC Hardmetal Ltd.
Summerleys Road, Princes Risborough
Buckinghamshire HP27 9PW, UK

Tel. +44 1844 342081, Fax: +44 1844 342415
SalesUK@sumitomotool.com
www.Sumitomotool.com



MAS
TOOLS & ENGINEERING

MAS GmbH

Schmigalla Straße 1 · 71229 Leonberg

Tel. +49 7152-6065-0
Fax +49 7152-6065-65

zentrale@mas-tools.de
www.mas-tools.de